


MOBİL İSKELE

SINCE'96

**FORMWORK
SCAFFOLDING
SYSTEMS
2024**



Web



Youtube



Referans



FACTORY OF DİLOVASI

Adress : Kobi OSB 3. Cad. No:40
Dilovası / KOCAELİ / TÜRKİYE

Phone : +90 262 742 06 37
Fax : +90 262 742 08 37
Web : ozleriskele.com
E-mail : info@ozleriskele.com - ozler@ozleriskele.com

BRANCH OF İZMİR

Adress : Kavaklıdere Mah. Ankara Cd. No:405/1
Bornova / İZMİR

Phone : +90 232 479 01 37
District Manager : Fatih Mehmet AYVACI
E-mail : fatih@ozleriskele.com


BRANCH OF ROMANIA

Adress : Strada DN CB Nr:274 Sat GLINA, Comuna
GLINA / ILFOV ROMANIA

Phone : +40 371 340 262
District Manager : İbrahim KARSLI
Web : ozler.ro
E-mail : office@ozler.ro

UNISCAFF / MOBİL İSKELE

UNISCAFF / Mobil İskele %100 iş güvenliği kurallarını dikkate alarak TS EN 1004 standartlarına uygun olarak dizayn edilmiştir. Zeminde rahat ve güvenli hareket sağlamak için TS EN 1004 standartlarına göre test yapılmış 600 veya 900 KG taşıma kapasiteli frenli tekerlekler kullanılır. Sistem çalışma yüksekliğine göre iç mekanlarda maksimum H=12 mt, dış mekanlarda maksimum H=8 mt olacak şekilde ÖZLER tarafından dizayn edilir.

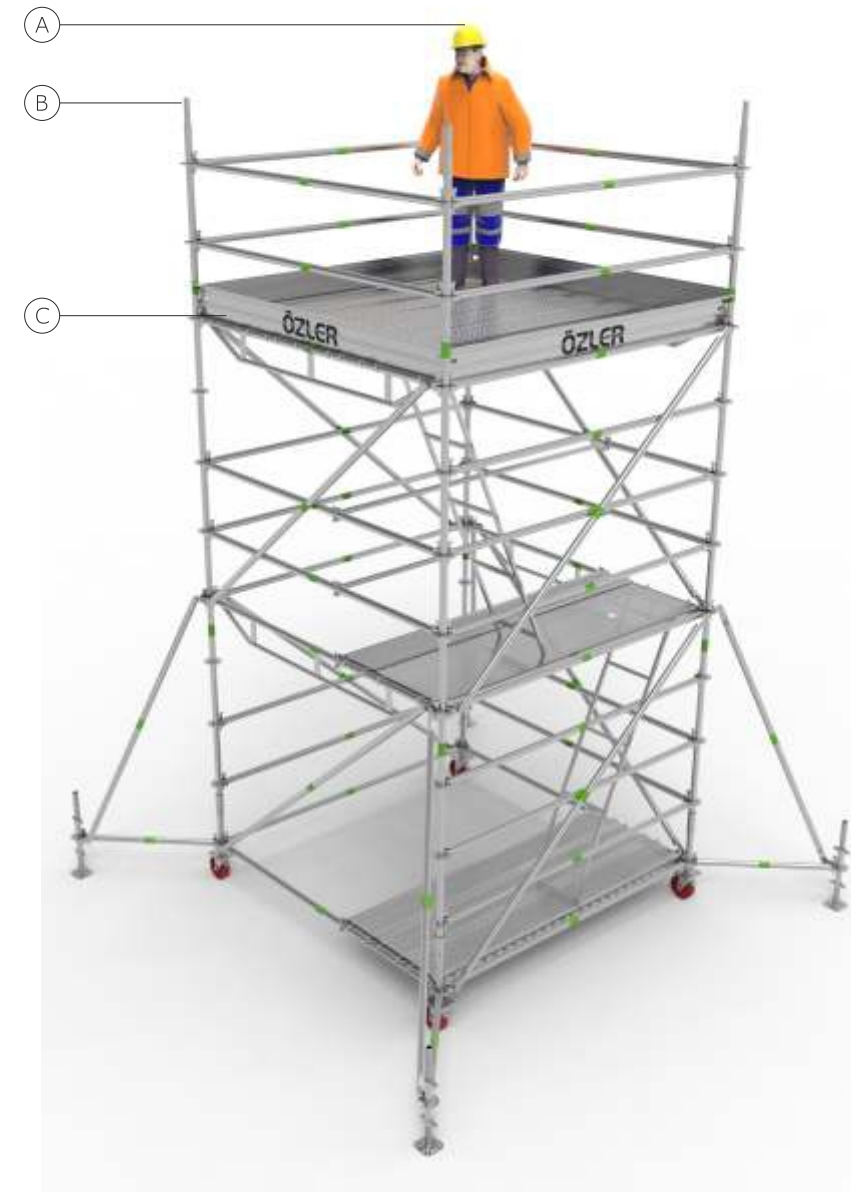

TS EN 1004 - 3 - 12 - H2 - XXCX
TS EN 1004 - 3 - 8 - H2 - XXCX

A - Çalışma Yüksekliği / Working Height - cm	385	400	435	450	585	600	635
B - İskele Yüksekliği / Scaffold Height - cm	310	325	360	375	510	525	560
C - Ayak Basma Yüksekliği / Footing Height - cm	185	200	235	250	385	400	435

Çalışma Alanı Working Area	075*250	B60751851	K60752001	B60752351	K60752501	B60753851	K60754001	B60754351
	111*250	B61111851	K61112001	B61112351	K61112501	B61113851	K61114001	B61114351
	137*250	B61371851	K61372001	B61372351	K61372501	B61373851	K61374001	B61374351
	200*250	B62001851	K62002001	B62002351	K62002501	B62003851	K62004001	B62004351
	250*250	—	—	—	—	B62503851	K62504001	B62504351
	300*300	—	—	—	—	—	—	—

UNISCAFF / MOBILE SCAFFOLDING TOWER

UNISCAFF / Mobile Tower is designed in accordance with TS EN 1004 standards with %100 safety rules. In the ground, braked wheels with a carrying capacity of 600 or 900 KG tested according to TS EN 1004 standards are used for safety and comfort. The system is designed by OZLER to be maximum H = 12 mt indoors and maximum H = 8 mt outdoors according to your working height.

US Mobil Başlangıç Ayağı - TS
US Mobile Tower Base Transom - TS

KOD CODE	BOYUT cm SIZE cm	AĞIRLIK kg WEIGHT kg
171002251	—	2,90



US Frenli Tekerlek Aparatı - K
US Braked Wheel Coupler - K

KOD CODE	BOYUT cm SIZE cm	AĞIRLIK kg WEIGHT kg
171001151	—	1,80



US Frenli Tekerlek
US Braked Wheel

KOD CODE	BOYUT cm SIZE cm	AĞIRLIK kg WEIGHT kg
171000153	600	4,40
171000163	900	7,20



US Kelepçeli Yatay
US Coupler Ledger

KOD CODE	BOYUT cm SIZE cm	AĞIRLIK kg WEIGHT kg
170525001	250	7,90



US Destek Ayağı
US Support Leg

KOD CODE	BOYUT cm SIZE cm	AĞIRLIK kg WEIGHT kg
171007501	—	6,40



Alt Ayar Mili Ø38 + Somun
Base Jack Ø38 + Nut

KOD CODE	BOYUT cm SIZE cm	AĞIRLIK kg WEIGHT kg
300102011	070	3,80
300103011	100	4,70



650	785	800	835	850	985	1000	1035	1050	1185	1200	1235	1250
575	710	725	760	775	910	925	960	975	1110	1125	1160	1175
450	585	600	635	650	785	800	835	850	985	1000	1035	1050

K60754501	—	—	—	—	—	—	—	—	—	—	—	—
K61114501	B91115851	K91116001	B91116351	K91116501	—	—	—	—	—	—	—	—
K61374501	B91375851	K91376001	B91376351	K91376501	—	—	—	—	—	—	—	—
K62004501	B92005851	K92006001	B92006351	K92006501	B92007851	K92008001	B92008351	K92008501	—	—	—	—
K62504501	B92505851	K92506001	B92506351	K92506501	B92507851	K92508001	B92508351	K92508501	B92509851	K92510001	B92510351	K92510501
—	—	—	—	—	—	—	—	—	B93009851	K93010001	B93010351	K93010501